
FERTILISER SPREADERS



mounted fertiliser spreader

DOBLE-695-R

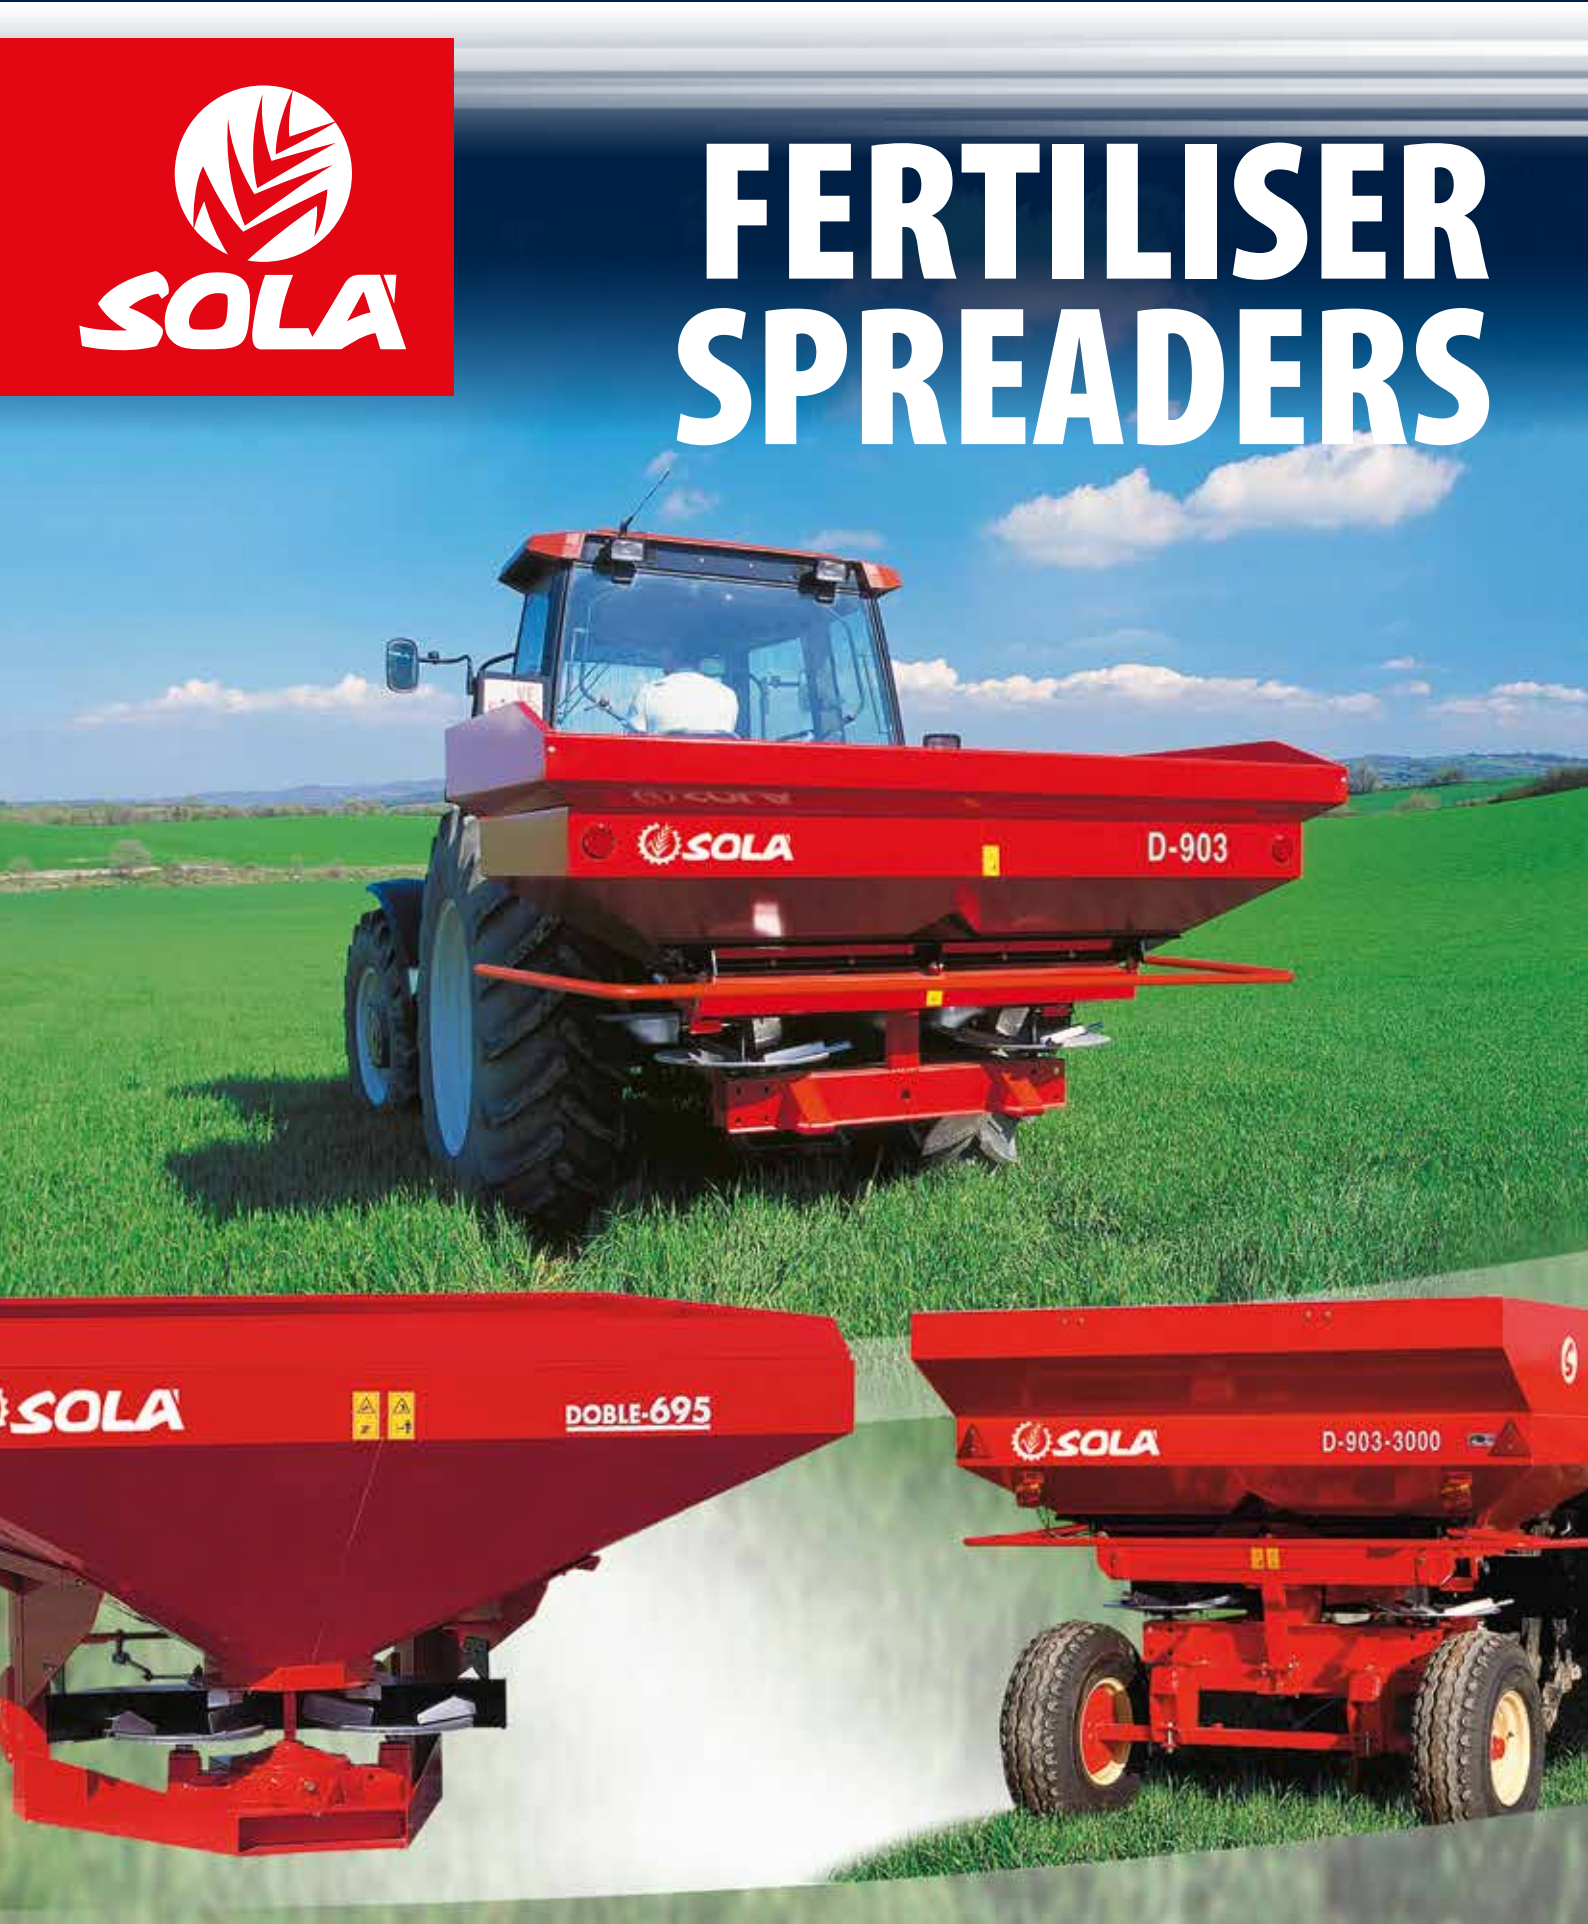

DOBLE-695-R/800



DOUBLE-695-R/1000



DOBLE-695-R/1200



TAMIS



STAINLESS STEEL DISC



HYDRAULIC CONTROL.



-SPÉCIAL SOLÁ SYSTEM.

CHARACTERISTICS

-TWO STAINLESS STEEL SPREADING DISCS.
-RUSTPROOFING TREATMENT WITH POWDER COATING.
-WORKING WIDHT UP TO 18 m.
-DOUBLE HYDRAULIC CONTROL FOR OPENING AND CLOSING.
-COUPLING BOLTS, CATEGORY II.
-HOPPER WITH TWO OUTPUTS.
-SIEVE.
-AGITATOR.
-WITH SAFETY CLUTCH.

OPTIONAL

-MECHANIC CONTROL ON THE FRAME.
-EDGE LIMITER.

TECHNICAL DATA

MODEL	LITRES	LOADING HEIGHT	TOTAL HEIGHT	HOPPER WIDTH	UNLOADED WEIGHT
DOBLE-695-R/800	800	85 cm	96 cm	190 cm	204 Kg
DOUBLE-695-R/1000	1.000	93 cm	105 cm	190 cm	220 Kg
DOBLE-695-R/1200	1.200	101 cm	121 cm	190 cm	230 Kg

mounted fertiliser spreaders

D-903 and D-903 PLUS



TECHNICAL SPECIFICATIONS

	D-903/1000	D-903/1200	D-903/1500	D-903/2000	D-903 PLUS/1000	D-903 PLUS/1200	D-903 PLUS/1500	D-903 PLUS/2000
Litres capacity	1.000	1.200	1.500	2.000	1.000	1.200	1.500	2.000
Working width (m.)	15-24	15-24	15-24	15-24	30-36	30-36	30-36	30-36

STANDART EQUIPMENT

-TWO STAINLESS STEEL SPREADING DISCS.
-WORKING WIDTH 15-24 m (D-903) or 30-36 m (D-903 PLUS)
-HYDRAULIC OPENING AND CLOSING CONTROL.
-FOLD-DOWN HOPPER FOR QUICK CLEANING.
-SLOW ROTATION SIDE AGITATORS.
-SIEVE.
-WITH SAFETY CLUTCH.
-LIGHTING.
-CONTENT LEVEL INDICATOR.
-MECHANICAL LIMITING SCREEN FOR BORDERS.
-ADJUSTING BORDERS AND WIDTH.
-DOSING TEST KIT.

OPTIONAL

-COVER FOR 1000, 1500 and 2000L.
-HYDRAULIC HEADLINE SCREEN.
-ELECTRONIC FLOW ADJUSTMENT.







-FOLDING HOPPER



-STAINLESS STEEL DISC
FOR 24 m.



-STAINLESS STEEL DISC
FOR 36 m.









D-903-PLUS/1000



D-903-PLUS/1200



D-903-PLUS/1500



D-903-PLUS/2000



	TECHNICAL SPECIFICATIONS	
	D-903/3000	D-903 PLUS/3000
Litres capacity	2.600	2.600
Working width (m.)	15-24	30-36

STANDARD EQUIPMENT

-TWO STAINLESS STEEL SPREADING DISCS.
-WORKING WIDTH 15-24m (D-903/3000) or 30-36m. (D-903/3000 PLUS).
-HYDRAULIC OPENING AND CLOSING CONTROL.
-SLOW ROTATION SIDE AGITATORS.
-SIEVE.
-WITH SAFETY CLUTCH.
-LIGHTING.
-CONTENT LEVEL INDICATOR.
-ADJUSTING BORDERS AND WIDTH.
-DOSING TEST KIT.
-HYDRAULIC AND MECHANICAL BRAKE.

OPTIONAL

-COVER.
-ELECTRONIC FLOW ADJUSTEMENT.
-TRANSMISSION HOMOCINÉTIQUE À CARDAN.



trailed twin-disc fertiliser spreaders

D-903/3000 and D-903/3000 PLUS



-DROP POINT ADJUSTMENT



-HYDRAULIC OPENING AND CLOSING CONTROL



-STAINLESS STEEL DISC FOR 24 m.



-STAINLESS STEEL DISC FOR 36 m.









CN-822301/GB-R-01

MAQUINARIA AGRÍCOLA SOLÁ, S.L.
Ctra. de Igualada, s/n. 08280 **CALAF** (Barcelona) ESPAÑA
Telf. (+34) 93 868 00 60 / sola@solagrupo.com

ISO 9001
BUREAU VERITAS
Certification