



FERTILIZE SPREADERS





Three point hitched single disc fertilize spreaders

SPECIAL-3



MODEL	LITRES	LOADING HEIGHT	HOPPER WIDTH	EMPTY WEIGHT
SP-3/500	500	97 cm	132 cm	140 kg
SP-3/750	750	114 cm	132 cm	164 kg
SP-3/900	900	123 cm	150 cm	180 kg

Standard equipment

- Stainless Steel spreading disc.
- Anti-rust treatment with powder coating.
- Spreading width: Up to 18m.
- Hydraulic opening-closing drive.
- Hitching bolts CAT-I and CAT-II.
- Screen.
- Agitator.
- PTO drive shaft with shearbolt.

Options

- Deflector to limit spreading width in orchards and vineyards.
- Mechanic opening-closing.



Mechanic opening-closing drive.



Hydraulic opening-closing drive.



Stainless Steel spreading disc.



Screen

Three point hitched double disc fertilize spreaders

DOBLE-695-R



Screen.



Stainless steel disc.



Hydraulic opening-closing drive.



SOLA special gearbox.



Standard equipment

- Stainless Steel spreading double disc.
- Anti-rust treatment with powder coating.
- Spreading width: Up to 18m.
- Double hydraulic opening-closing drive.
- Hitching bolts CAT-II.
- Screen.
- Agitator.
- PTO drive shaft with safety device.

Options

- Deflector to limit spreading width in orchards and vineyards.
- Mechanic opening-closing.

CARACTERÍSTICAS TÉCNICAS

MODEL	LITRES	LOADING HEIGHT	TOTAL HEIGHT	HOPPER WIDTH	EMPTY WEIGHT
DOBLE-695-R/800	800	85 cm	96 cm	190 cm	204 Kg
DOBLE-695-R/1000	1.000	93 cm	105 cm	190 cm	220 Kg
DOBLE-695-R/1200	1.200	101 cm	121 cm	190 cm	230 Kg



	D-903/1000	D-903/1200	D-903/1500	D-903/2000	D-903 PLUS/1000	D-903 PLUS/1200	D-903 PLUS/1500	D-903 PLUS/2000
Capacity (Litres)	1.000	1.200	1.500	2.000	1.000	1.200	1.500	2.000
Working width (m.)	15-24	15-24	15-24	15-24	30-36	30-36	30-36	30-36

Standard equipment

- Stainless Steel spreading double disc.
- Spreading width from 15-24m(D-903) or 30-36m(D-903-Plus).
- Hydraulic opening-closing drive.
- Flip-up hopper for an easy cleaning.
- Slow turn side agitators.
- Double screen.
- PTO drive shaft with safety device.
- Anti-rust treatment with powder coating.
- Hitching bolts CAT-II.
- Lights for transport.
- Hopper level indicator.
- Mechanical limiting deflector for headlands.
- Adjustable nozzle for edges or width reduction.
- Kit for dosage calibration.

Options

- Cover for 1000, 1500 and 2000L.
- Hydraulic limiting deflector for headlands.




Three point hitched double disc fertilize spreaders

D-903 y D-903 PLUS



Flip-up hopper

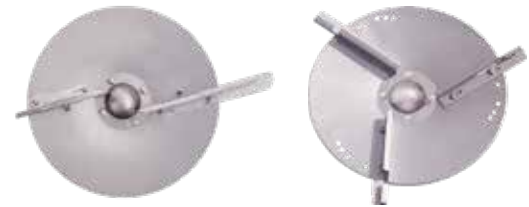

Stainless Steel disc for 24m. Stainless Steel disc for 36m.



D-903-PLUS/1000



D-903-PLUS/1200



D-903-PLUS/1500



D-903-PLUS/2000



	D-903/3000	D-903 PLUS/3000
Capacity (Litres)	2.600	2.600
Working width (m.)	15-24	30-36

Standard equipment

- Stainless Steel spreading double disc.
- Spreading width from 15-24m(D-903/3000) or 30-36m(D-903/3000 Plus).
- Hydraulic opening-closing drive.
- Slow turn side agitators.
- Double screen.
- PTO drive shaft with safety device.
- Lights for transport.
- Hopper level indicator.
- Adjustable nozzle for edges or width reduction.
- Kit for dosage calibration.
- Hydraulic and mechanic brake.
- Anti-rust treatment with powder coating.

Options

- Cover
- Wide Angle PTO drive shaft.



Double disc trailed fertilize spreaders.

D-903/3000

D-903/3000 PLUS



Fertilize drop control.



Hydraulic opening-closing drive.



Stainless Steel disc for
24m.



Stainless Steel disc for
36m.





FERTILIZE SPREADERS



MAQUINARIA AGRÍCOLA SOLÁ, S.L.
Ctra. de Igualada, s/n. 08280 CALAF (Barcelona) ESPAÑA
Telf. (+34) 93 868 00 60 / sola@solagrupo.com

