




NO-TILL SEED DRILL

SD-1203



NO TILL SD-1203

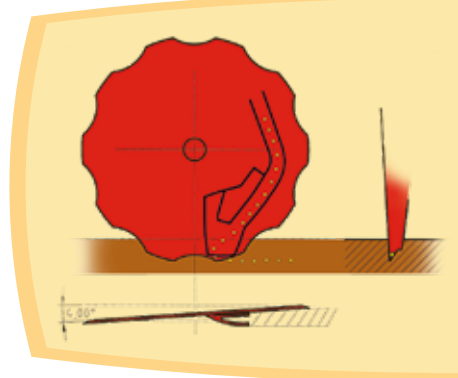

	250/13	300/17	350/19	400/21
Furrower type	DISC SD			
Working width [m]	2,5	3	3,5	4
Number of rows	2			
Transport width [m]	2,55	3,05	3,55	4,05
Number of rows	13	17	19	21
Row spacing [cm]	19,2	17,6	18,4	19,0
Standard seed hopper capacity [l]	850	1.040	1.230	1.430
Standard seed/fertiliser hopper capacity [l]	408/442	500/540	590/640	686/744
Weight with standard seed hopper [kg]	1920	2190	-	-
Reload height [cm]	187			
Reload opening [cm]	212x61	262x61	312x61	362x61
Coupling category	Cat. III			
Minimum power required [hp]	140	160	180	200
Metering unit drive SEED machine	Mechanical with speed variator. Metering unit for different types of seed			
Metering unit drive SEED/FERTILISER machine	Mechanical with double speed variator. Metering unit for different types of seed and fertiliser			
Hopper seed agitators	Standard on seed			
Seed drop tubes	Plastic tube. 1 drop tube per row			
Spring harrow	Double row of angled tines. Standard			
Seed dose calibration kit	Standard			
Ladder and platform to access the hopper	Standard			
Depth control wheels	Choose between rubber or steel control wheels			
Signal lights	Standard			
Tramlines	Optional, with electric cylinder			

- Compact and robust design.
- Ideal for small farms.
- Great transfer of weight to the ground surface.
- Easy to handle.
- Discs with high cutting capacity.

- Non-till seeder.
- Coulter available: COGGED DISC WITH SUFFOLK COULTER.
- Depth control wheels: rubber or steel.
- Sowing gear mounted in 2 rows.
- High-capacity hopper depending on the width of the machine.
- Volumetric metering unit with mechanical drive for different types of seed and seed/fertiliser.

- Speed variator on the seed model.
- Independent speed variators on the seed/fertiliser model.
- Kit for calibrating the seed dose.
- Walkway.
- Signal lights.
- Ladder and platform to access the hopper.



MAQUINARIA AGRÍCOLA SOLÁ, S.L.
Ctra. de Igualada, s/n. 08280 CALAF (Barcelona) ESPAÑA
Telf. (+34) 93 868 00 60 / sola@solagrupo.com

